


Key:

	Carriageway binder course
	Carriageway surface course
	Carriageway reinstatement

Schedule of Works and Quantities:
(approximations of main items)

Description	Quantity
Take up and disposal to tip off site kerb.	18ln.m
Take up and take to Merrow Depot granite kerb.	18ln.m
Take up and disposal to tip off tactile paving.	3sq.m
Take up and disposal to tip off site 560x830 inspection cover.	1No.
Install new 110 dia. service duct (provisional).	1ln.m
Install new type 1 gully.	2No.
Install new 150 dia drain pipe (provisional).	10ln.m
Geogrid Tensor type AS-0108-L1.	36sq.m
Type 1 sub-base 200mm thick.	7cu.m
Separation and waterproof membranes.	36sq.m
Reinforced concrete base course 180mm thick.	6cu.m
Install new kerb HB2 straight.	27ln.m
Install new kerb HB2 8.0m radius.	2ln.m
Install new kerb HB2 2.0m radius.	2ln.m
Install new kerb BN 8.0m radius.	2ln.m
Install new kerb BN 2.0m radius.	2ln.m
Install new kerb DL/DR 8.0m radius.	2No.
Install new kerb DL/DR 2.0m radius.	2No.
AC 20 HDM binder course 110mm thick.	34sq.m
HRA 35/14 WTR2 with PCC surf 50mm thick.	41sq.m
Install 560x830 C125 recess inspection cover.	1No.
Adjust valve box cover and frame.	1No.
Adjust telecom cover and frame.	2No.
Adjust gully cover and frame.	1No.
Install bollard from Epsom town centre set aside (repaint).	40No.
Lay new tactile paving (buff).	4sq.m
Footway reinstatement (SD1000/09).	101sq.m
Road markings (removal and placement).	1 Item
Install temporary road sign to TSRGD diag. 7014 'NEW ROAD LAYOUT AHEAD'.	3No.
SKANSKA Disconnect, relocate & reconnect existing lighting column.	1No.

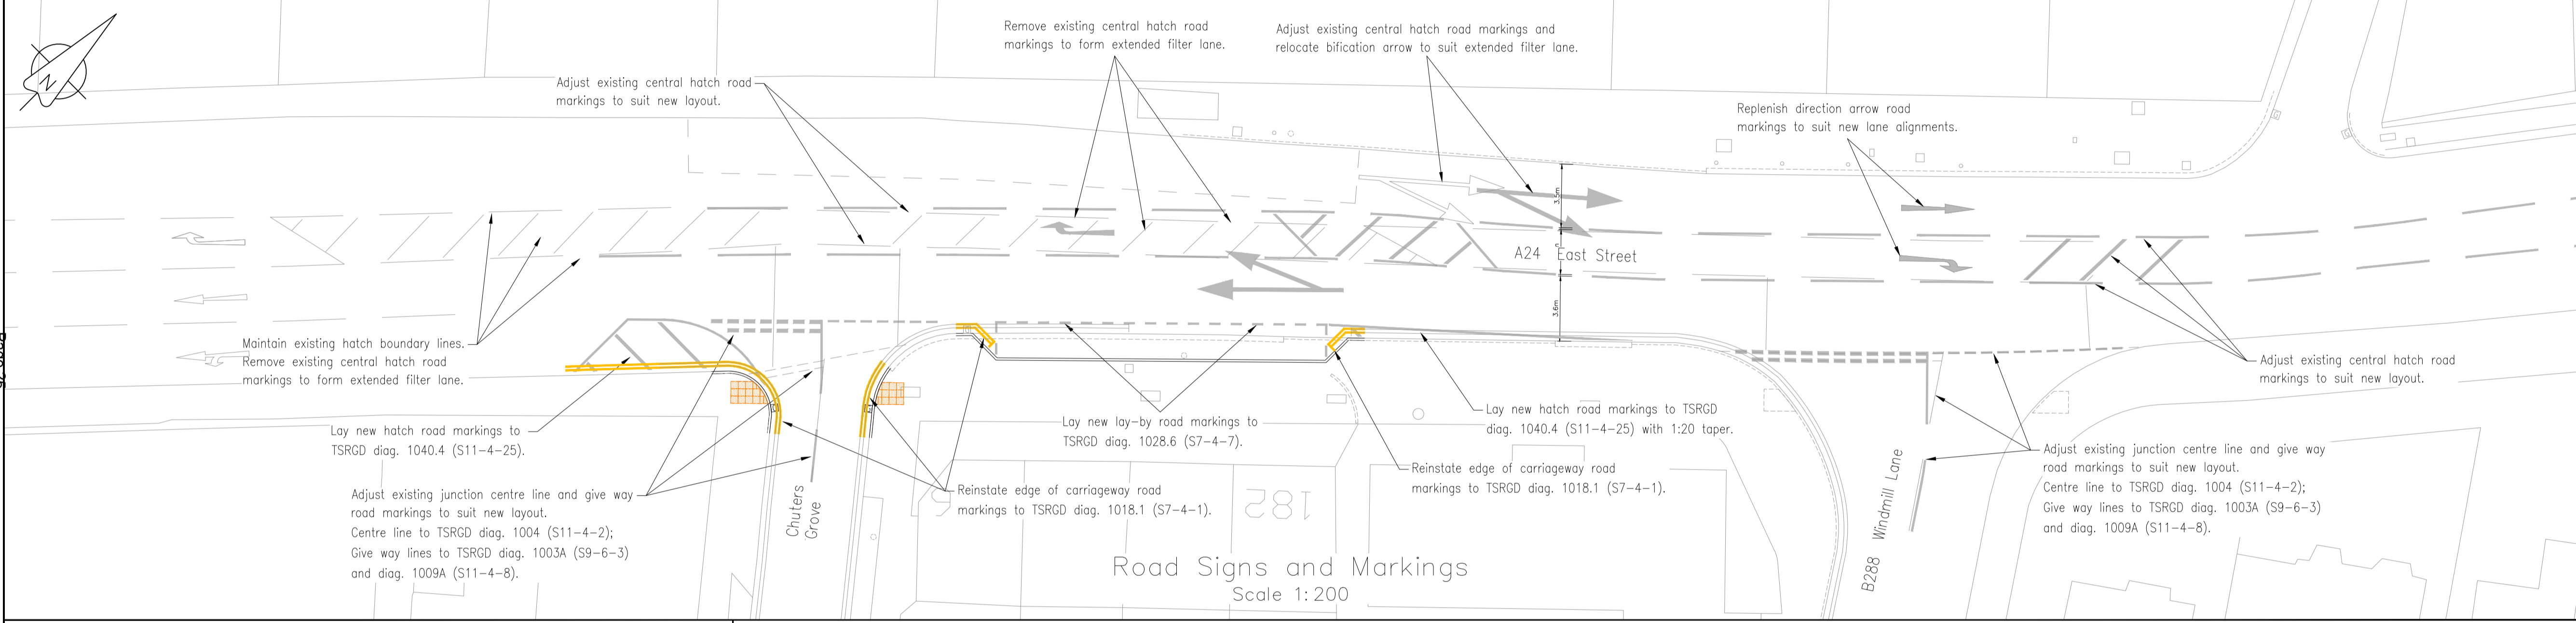

Notes for Road Markings

- Hatch lines laid with square ends, as in Photograph 1 below, and not mitred ends, as TSRGD, will not be accepted.
- Worded markings that are laid as in the example shown in Photograph 1 below and not elongated lettering as TSRGD Schedule 17 Part 7 will not be accepted.

Road marking to TSRGD diagram 1026 (S11-4-16)

Road marking to TSRGD diagram 1040 (S11-4-23)

Elongated lettering to TSRGD Schedule 17 Part 7

Photograph 1

Notes

Rev.	Description	Drwn	Sig.	Date	Chkd	Sig.	Date	Appr	Sig.	Date

North Point

See panel

ID	Sig.	Date

Scale AS INDICATED ABOVE

Project

A24 EAST STREET, EPSOM
PARKING FACILITY IMPROVEMENTS

Drawing

PARKING LAY-BY
Binder & Surface Courses and Road Signs & Markings

SHEET 1 OF 2

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks. (Reference shall also be made to the Design Hazard Log)

CONSTRUCTION:

MAINTENANCE/CLEANING:

USE:

DECOMMISSIONING/DEMOLITION:

If it is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement.

Project No. PC0628

Contract Sheet No. PC0628/63

Rev. -

Classification CONSTN/DRAFT

SURREY COUNTY COUNCIL

ITEN 2

This page is intentionally left blank