ITEM 11

REMOVE EXISTING HATCHING ROAD MARKINGS AND ADJUST GIVE WAY ROAD MARKING LINES TO SUIT NEW ALIGNMENT

REPLACE EXISTING GIVE WAY ARROW ROAD MARKING WITH A NEW GIVE WAY ARROW ROAD MARKING TO DIAG No. 1023 IN THE CENTRE OF THE RE-ALIGNED CARRIAGEWAY

REPLACE EXISTING 'LOOK LEFT' ROAD MARKING WITH A 'LOOK LEFT' ROAD MARKING TO DIAG No. 1029 IN THE CARRIAGEWAY INFRONT OF NEW TACTILE ARRANGEMENT

REMOVE EXISTING 'T' SHAPED TACTILE ARRANGEMENT AND REPLACE WITH A NEW 'L' SHAPED TACTILE FACILITY TO SCC STANDARD DETAIL DRAWING 1000/30 Rev. D

REMOVE EXISTING EXTENDED TACTILE ARRANGEMENT

REMOVE EXISTING TACTILE ARRANGEMENT AND REPLACE WITH A NEW TACTILE FACILITY ON THE NEW KERBLINE TO SCC STANDARD DETAIL DRAWING 1000/30 Rev. D

EXISTING TACTILE FACILITY TO REMAIN UNTOUCHED

INSTALL 2 No. ROWS OF NEW ROAD STUDS, 100mm² AND 500mm APART

RELOCATE EXISTING TRAFFIC SIGNALS POLE No. 2 APPROXIMATELY 3.5m FROM IT'S CURRENT LOCATION TO A POSITION ADJACENT TO THE NEW TACTILE ARRANGEMENT AND KERBLINE

HIGH STREET

A24 ASHLEY ROAD

LOOK LEFT

LOOK RIGHT

0.8m

2.4m

HB2

TK

DK x4

BIN

BENCH

TREE

CPS/BS

CPS

SCHEME LOCATION PLAN

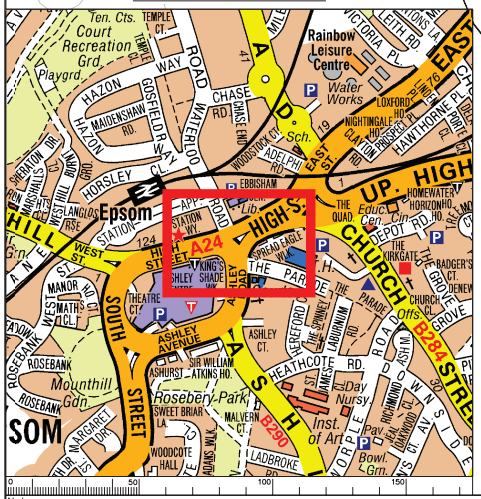

KEY

PROPOSED KERBLINE - TOTAL LENGTH - 25m

HIGHWAY BOUNDARY

(A) PROPOSED FOOTWAY BUILDOUT TO SCC STANDARD DETAIL DRAWING 1000/35 Rev. A - TOTAL AREA - 28m²

(B) PROPOSED MIXED MODULAR PAVING - 400 x 400 FLAGS & 100 x 200 BLOCKS - TOTAL AREA - 110m²

(C) PROPOSED 400 x 400 FLAG PAVING OUTSIDE HIGHWAY BOUNDARY EXTENTS - TOTAL AREA - 75m²

OPTION 1

NEW KERBLINE AND TACTILE CROSSING TO BE IMPLEMENTED. AREA 'A' TO BE CONSTRUCTED & PAVED WITH MODULAR PAVING TO MATCH AS WELL AS POSSIBLE WITH EXISTING AREA 'B'

OPTION 2

NEW KERBLINE AND TACTILE CROSSING TO BE IMPLEMENTED. PAVING WITHIN AREA 'B' TO BE REMOVED AND NEW MODULAR PAVING TO BE LAID AT AN AGREED PATTERN/DESIGN IN AREAS 'A' AND 'B'

OPTION 3

NEW KERBLINE AND TACTILE CROSSING TO BE IMPLEMENTED. PAVING WITHIN AREA 'B' & 'C' TO BE REMOVED AND NEW MODULAR PAVING TO BE LAID AT AN AGREED PATTERN/DESIGN IN AREAS 'A', 'B' AND 'C'

Notes

Rev.	Description	Drwn	Sig.	Date	Chkd	Sig.	Date	Appr	Sig.	Date

File Name C:\Projects\Surrey\PC0265 - Spread Eagle Junction, Epsom\Option 1 General Arrangement (PC0265-03).dwg

Scale 1:50 @ A1

North Point

'Based upon the Ordnance Survey mapping with the permission of the Controller of Her Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.' Surrey County Council LA 076872 2002.

Drawn by	SP	SP	16-07-12
Checked by originator	JC	JC	16-07-12
Approved by			

Project: SPREAD EAGLE JUNCTION, EPSOM
JUNCTION/CROSSING RE-ALIGNMENT

Drawing: OPTION 1
GENERAL ARRANGEMENT

SHEET 1 OF 1

SURREY COUNTY COUNCIL

Project No. PC0265

Contract No.

Sheet No.

Drawing No. PC0265/03

Rev.

Classification DRAFT

A1

This page is intentionally left blank