


Dia 629 Width Restriction sign
with
Dia 670 30mph speed limit sign.



Barrier and End Types specification.

To 'Optimum Barriers' Standard or similar Tel:(01902) 403197

Steel to BS EN 10025 Grade 430A galvanised to BS 729

1600mm x 310mm x 3mm barrier rail with terminal end type 'A'


Black and white 200mm Diameter steel bollards with red and white reflective strips 900mm high

255mm x 125mm BN kerb with 125mm upstand

Road surface


600mm x 750mm deep ST4 concrete surround

Dia 629 Width Restriction sign with Dia 670 30mph speed limit sign. (On reverse side)
Dia 629 Width Restriction sign with Dia 671 National Speed Limit sign



(On reverse side)

Dia 629 Width Restriction sign with Dia 671 National Speed Limit sign.

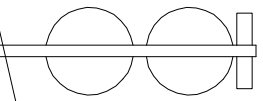


'Flecta' style keep left bollard

Large base post with lighting unit

800mm high RSJ rigid steel posts in concrete surround

600mm x 600mm ST4 concrete surrounds

Approximate position of 6" Gas main

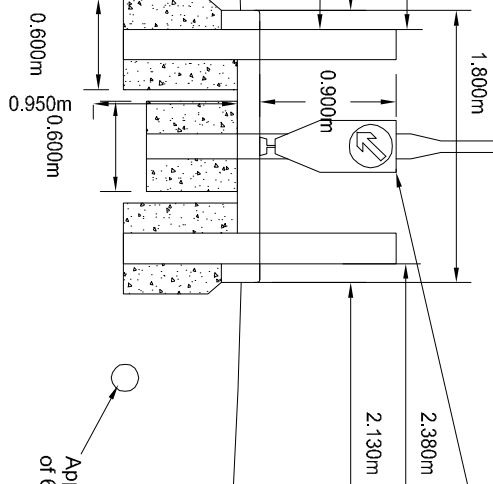

**DETAIL OF WIDTH RESTRICTION
LOOKING NORTH
SCALE 1:50**

1.8m WIDE 2.8m LONG TRAFFIC SPLITTER ISLAND WITH 2 No. 'FLECTA' KEEP LEFT BOLLARDS AND 2 No. 200mm DIAMETER 900mm HIGH STEEL POSTS WITH RED AND WHITE REFLECTIVE STRIPS.

Solar panels to be mounted on all illuminated signs on width restriction. Specification to be agreed with SCC